

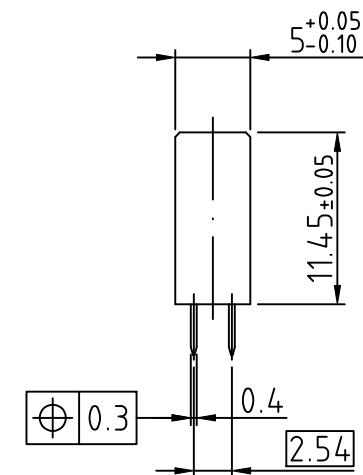


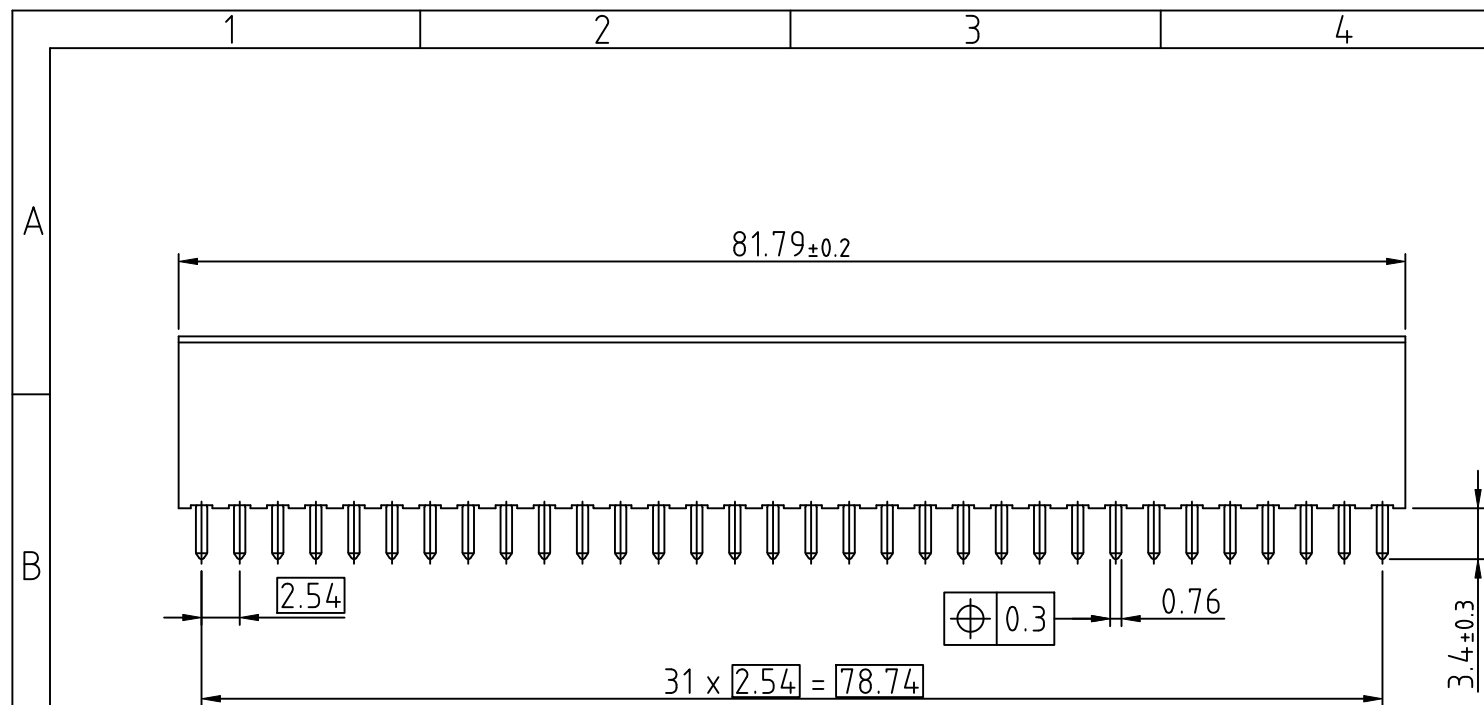


962-4032X-03 VarPol PC/104 2x32 pol. / pin
Löt / dip-solder 3.4mm

+	Position bestückt
---	-------------------

+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	a	
+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	b	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32

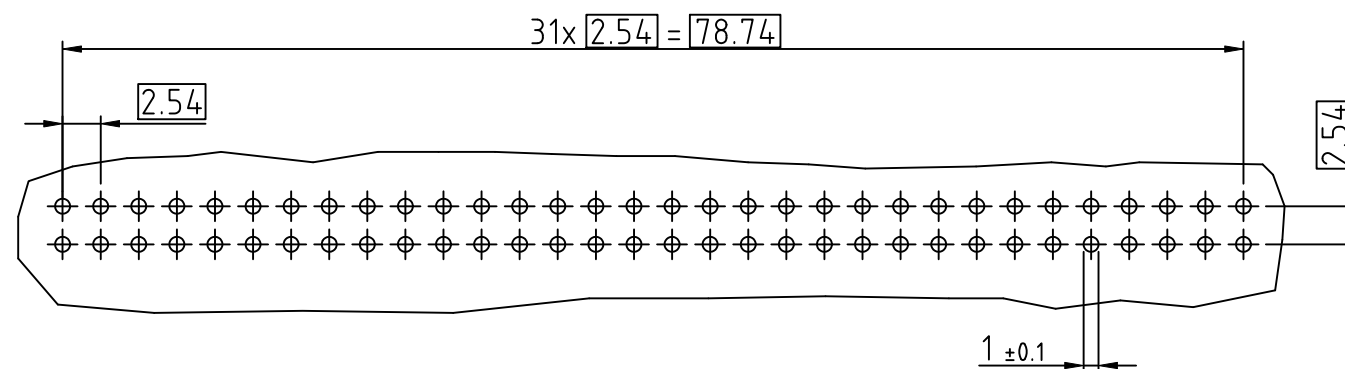

Technische Änderungen vorbehalten / All data subject to amendment without notice

Legende / legend										
x = 2		Güteklasse 3 / class 3								
x = 6		Güteklasse 2 / class 2								
Werkstoff / Material:				Allgemeintoleranz / General tolerances			Maßstab / Scale: 2:1			
				Tolerierungsgrundsatz Fundamental tolerancing principle DIN ISO 8015			Verwendungsbereich / Range of application			
				A3		Kundenzzeichnung / customer drawing				
					Datum / Date	Name / Name	Benennung / Description PC/104 Federleiste / fem. connector Löt / dip solder 3,4mm 2x32 pol. / pin			
				Erst./Drawn	25.01.2002	Miller				
				Gepr./Insp.						
02	drawing modified	03.08.2011	Kowat.	 ept GmbH www.ept.de			Zeichnungsnummer / Drawing number		Art / Art	Blatt / Sheet
01	drawing modified	12.01.2009	Mil.				962-4032x-03		C	Status/Status
Version/ Version	Änderung / Revision	Datum/Date	Name/Name				Gewicht / Weight:			