

# Product Data Sheet

DIN 41612 Female straight, type M,  
Part No. 124-60062-00


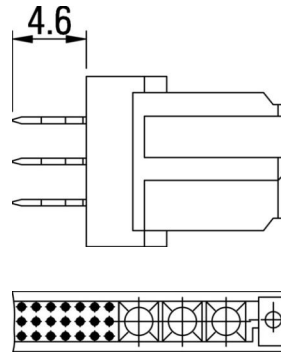


Illustration similar



Perpendicular

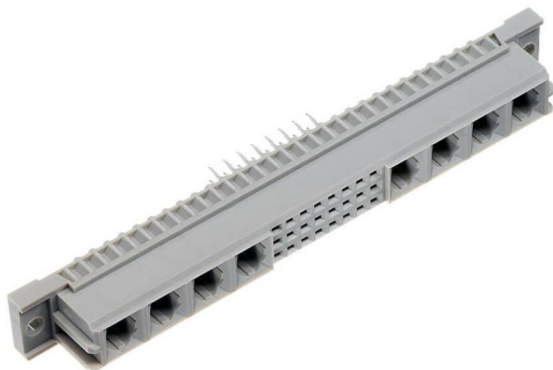

Press-fit



Power



Rugged

- Termination length 4.6 mm
- 42 + 6 contacts
- Press-fit
- performance level 2



» to product on [www.ept.de](http://www.ept.de)



» to product group DIN 41612

# Product Data Sheet

DIN 41612 Female straight, type M,  
Part No. 124-60062-00



## Technical Specifications

### Basics

|                             |                         |
|-----------------------------|-------------------------|
| Specification               | IEC 60603-2 (DIN 41612) |
| Performance Level           | 2                       |
| No. of Contacts             | 42 + 6                  |
| Termination Technology      | Press-fit               |
| Termination Length          | 4.6 mm                  |
| Operating Temperature Range | -55°C to +125°C         |

### Material

|                               |                            |
|-------------------------------|----------------------------|
| Insulator Material            | PBT glass filled UL 94 V-0 |
| CTI value<br><i>IEC 60112</i> | 200                        |
| Contact Material              | Copper alloy               |

### Mechanical

|                          |                   |
|--------------------------|-------------------|
| Pitch                    | 2.54 mm           |
| Mating Force             | < 40 N            |
| Separating Force per Pin | > 0.15 N          |
| Durability               | 400 mating cycles |

### Electrical

|                        |                      |
|------------------------|----------------------|
| Operational Current    | 4.8 A                |
| Contact Resistance     | <20 mΩ               |
| Clearance and Creepage | ≥ 1.2 mm             |
| Insulation Resistance  | > 10 <sup>6</sup> MΩ |
| Test Voltage           | 1000 V               |

### Approval / Compliance

|             |                |
|-------------|----------------|
| UL file     | E130314        |
| Environment | RoHS compliant |


# Product Data Sheet

DIN 41612 Female straight, type M,  
Part No. 124-60062-00



## Derating Diagram

Current carrying capacity DIN M signaling contacts  
max. 4.8A at 20°C

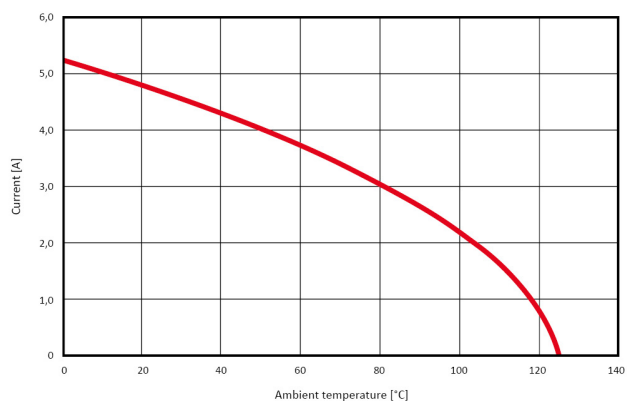


# Product Data Sheet

DIN 41612 Female straight, type M,  
Part No. 124-60062-00



## Hole Specifications

Plated through-hole according to IEC 60352-5



| Material               | imm. Sn printed circuit boards |
|------------------------|--------------------------------|
| <b>Nominal Hole</b>    | <b>Ø 1.0 mm</b>                |
| <b>A PCB Thickness</b> | min 1.44 mm                    |
| <b>B Plated Hole</b>   | Ø 1.0 +0.09 / -0.06 mm         |
| <b>C Drill Hole</b>    | 1.15 ±0.025 mm                 |
| <b>D Cu Plating</b>    | min. 25 µm                     |
| <b>E Surface</b>       | imm. Sn plating, max. 1.5 µm   |
| <b>F Annular Ring</b>  | min. 0.1 mm                    |

| Material               | Ni, Au printed circuit boards                       |
|------------------------|---|
| <b>Nominal Hole</b>    | <b>Ø 1.0 mm</b>                                     |
| <b>A PCB Thickness</b> | min 1.44 mm   |
| <b>B Plated Hole</b>   | Ø 1.0 +0.09 / -0.06 mm                              |
| <b>C Drill Hole</b>    | 1.15 ±0.025 mm                                      |
| <b>D Cu Plating</b>    | min. 25 µm  |
| <b>E Surface</b>       | Ni, Au plating, 0.05 - 0.2 µm Au over 2.5 - 5 µm Ni |
| <b>F Annular Ring</b>  | min. 0.1 mm   |

| Material               | pure Cu printed circuit boards                 |
|------------------------|--|
| <b>Nominal Hole</b>    | <b>Ø 1.0 mm</b>                                |
| <b>A PCB Thickness</b> | min 1.44 mm                                    |
| <b>B Plated Hole</b>   | Ø 1.0 +0.09 / -0.06 mm                         |
| <b>C Drill Hole</b>    | 1.15 ±0.025 mm                                 |
| <b>D Cu Plating</b>    | min. 25 µm                                     |
| <b>E Surface</b>       | OSP, z.B. GLICOAT-SMD (F2) with 0.12 - 0.15 µm |
| <b>F Annular Ring</b>  | min. 0.1 mm                                    |

| Material               | HAL Sn printed circuit boards |
|------------------------|-------------------------------|
| <b>Nominal Hole</b>    | <b>Ø 1.0 mm</b>               |
| <b>A PCB Thickness</b> | min 1.44 mm                   |
| <b>B Plated Hole</b>   | Ø 1.0 +0.09 / -0.06 mm        |
| <b>C Drill Hole</b>    | 1.15 ±0.025 mm                |
| <b>D Cu Plating</b>    | min. 25 µm                    |
| <b>E Surface</b>       | HAL Sn, 5 - 15 µm             |
| <b>F Annular Ring</b>  | min. 0.1 mm                   |

# Product Data Sheet

DIN 41612 Female straight, type M,  
Part No. 124-60062-00

---



## Modifications

Available on request

- Without flange
- Special contact length
- Performance levels I + III or customer-specific
- Contact arrangement

## Accessories

- » DIN 41612 High power contact for type M  
Part Number 916-61002

## Drawings

Component data in 2D and 3D format you can download here:

» [PDF](#)