

# Product Data Sheet

DIN 41612 VME 64x female,  
Part No. 306-67069-14






Illustration similar



Perpendicular

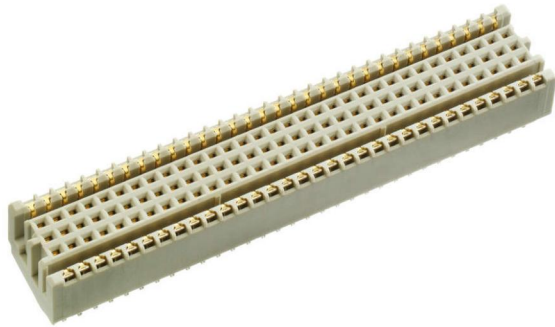

Press-fit



Rugged

- Termination length 17 mm
- with plug-in zone in performance level 1
- 160 contacts
- Press-fit
- performance level 1
- Ansi flange



» to product on [www.ept.de](http://www.ept.de)



» to product group DIN 41612

# Product Data Sheet

DIN 41612 VME 64x female,  
Part No. 306-67069-14



## Technical Specifications

### Basics

Specification	IEC 61076-4-113
Performance Level	1
No. of Contacts	160
Termination Technology	Press-fit
Termination Length	17 mm
Operating Temperature Range	-55°C to +125°C

### Material

Insulator Material	PBT glass filled UL 94 V-0
CTI value <i>IEC 60112</i>	200
Contact Material	Copper alloy

### Mechanical

Pitch	2.54 mm
Mating Force	160 N
Separating Force per Pin	> 0.15 N
Durability	500 mating cycles

### Electrical

Operational Current	1.5 A
Contact Resistance	<20 mΩ
Clearance and Creepage	abc ≥ 1.2 mm, zd ≥ 1.0 mm
Insulation Resistance	10 <sup>4</sup> MΩ
Test Voltage	1000 V

### Approval / Compliance


UL file	E130314
Environment	RoHS compliant

# Product Data Sheet

DIN 41612 VME 64x female,  
Part No. 306-67069-14



## Derating Diagram

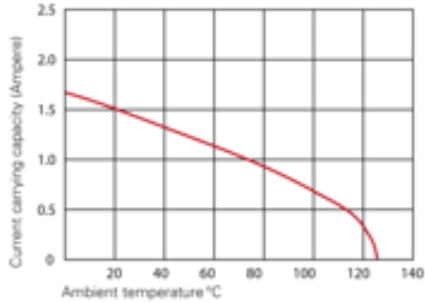

### Type B, Q, C, R

20°C	1.5 A
70°C	1.1 A
100°C	0.7 A


# Product Data Sheet

DIN 41612 VME 64x female,  
Part No. 306-67069-14



## Hole Specifications

Plated through-hole according to IEC 60352-5

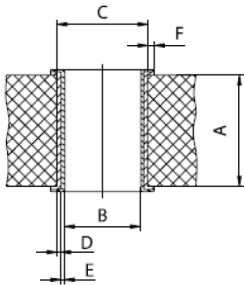

Material	imm. Sn printed circuit boards
<b>Nominal Hole</b>	<b>Ø 1.0 mm</b>
<b>A PCB Thickness</b>	min 1.44 mm
<b>B Plated Hole</b>	Ø 1.0 +0.09 / -0.06 mm
<b>C Drill Hole</b>	1.15 ±0.025 mm
<b>D Cu Plating</b>	min. 25 µm
<b>E Surface</b>	imm. Sn plating, max. 1.5 µm
<b>F Annular Ring</b>	min. 0.1 mm

Material	Ni, Au printed circuit boards
<b>Nominal Hole</b>	<b>Ø 1.0 mm</b>
<b>A PCB Thickness</b>	min 1.44 mm
<b>B Plated Hole</b>	Ø 1.0 +0.09 / -0.06 mm
<b>C Drill Hole</b>	1.15 ±0.025 mm
<b>D Cu Plating</b>	min. 25 µm
<b>E Surface</b>	Ni, Au plating, 0.05 - 0.2 µm Au over 2.5 - 5 µm Ni
<b>F Annular Ring</b>	min. 0.1 mm

Material	pure Cu printed circuit boards
<b>Nominal Hole</b>	<b>Ø 1.0 mm</b>
<b>A PCB Thickness</b>	min 1.44 mm
<b>B Plated Hole</b>	Ø 1.0 +0.09 / -0.06 mm
<b>C Drill Hole</b>	1.15 ±0.025 mm
<b>D Cu Plating</b>	min. 25 µm
<b>E Surface</b>	OSP, z.B. GLICOAT-SMD (F2) with 0.12 - 0.15 µm
<b>F Annular Ring</b>	min. 0.1 mm

Material	HAL Sn printed circuit boards
<b>Nominal Hole</b>	<b>Ø 1.0 mm</b>
<b>A PCB Thickness</b>	min 1.44 mm
<b>B Plated Hole</b>	Ø 1.0 +0.09 / -0.06 mm
<b>C Drill Hole</b>	1.15 ±0.025 mm
<b>D Cu Plating</b>	min. 25 µm
<b>E Surface</b>	HAL Sn, 5 - 15 µm
<b>F Annular Ring</b>	min. 0.1 mm

# Product Data Sheet

DIN 41612 VME 64x female,  
Part No. 306-67069-14

---



## Accessories

» DIN 41612 Shroud VME  
Part Number 315-15401

» DIN 41612 Shroud VME  
Part Number 315-15402

## Drawings

Component data in 2D and 3D format you can download here:

[» PDF](#)

[» 3D IGES](#)

[» 3D STEP](#)

[» 3D PDF](#)