

Product Data Sheet

DIN 41612 Male straight, type D,
Part No. 105-40016






Illustration similar



Parallel

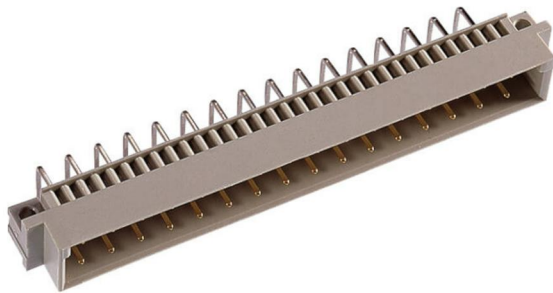

Through Hole



Power



Rugged

- Termination length 3.7 mm
- 16 contacts
- solder
- performance level 2
- flange perpendicular to termination direction



» to product on www.ept.de



» to product group DIN 41612

Product Data Sheet

DIN 41612 Male straight, type D,
Part No. 105-40016



Technical Specifications

Basics

Specification	IEC 60603-2 (DIN 41612)
Performance Level	2
No. of Contacts	16
Termination Technology	solder
Termination Length	3.7 mm
Board-to-Board Distance	17.85 mm
Operating Temperature Range	-55°C to +125°C

Material

Insulator Material	PBT glass filled UL 94 V-0
CTI value <i>IEC 60112</i>	200
Contact Material	Copper alloy

Mechanical

Pitch	5.08 mm
Mating Force	< 40 N
Separating Force per Pin	> 0.15 N
Durability	400 mating cycles

Electrical

Operational Current	5.6 A
Contact Resistance	< 15 mΩ
Clearance and Creepage	≥ 3.0 mm
Insulation Resistance	> 10 ⁶ MΩ
Test Voltage	1500 V

Processing

Soldering Temperature	to 260°C
-----------------------	----------

Approval / Compliance


UL file	E130314
Environment	RoHS compliant

Product Data Sheet

DIN 41612 Male straight, type D,
Part No. 105-40016



Derating Diagram

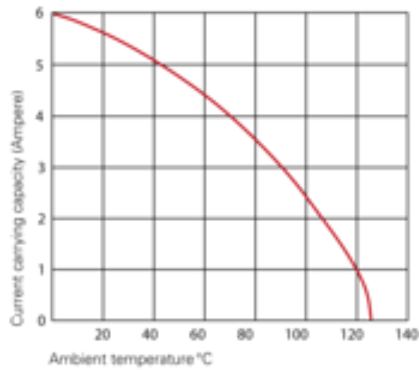

Type D, E, F, G

20°C	5.6 A
70°C	4.0 A
100°C	2.5 A

Product Data Sheet

DIN 41612 Male straight, type D,
Part No. 105-40016



Modifications

Available on request

- Pre-mating and late-mating contacts
- Contact arrangement
- Performance levels I + III or customer-specific
- Special contact length

Drawings

Component data for this product you can request through sales@ept.de